

# POLYMER ABOVE GROUND METER BOX (AGB)



## APPLICATION


- Pre-plumbed above ground meter installation in a rectangular polymer above ground meter box. (AGB)
- Suitable for all domestic metering applications and AMR.

## FEATURES

- Approved 15mm Polymer pulse ready Class C volumetric ASM water meter.
- Lockable lid with a tamper resistant locking mechanism operated by means of a special key.
- Meter box lid manufactured from UV stabilised engineering polymer.
- 20mm Female BSP parallel threaded polymer inlet/outlet fittings.
- SABS approved polymer consumer ball valve with external handle.
- Internal high-quality plastic elbow valve upstream of the meter for meter maintenance and cut offs. This valve is operated using a loose key.
- Meter counter and serial number read through a reading slot which has a spring-loaded sliding cover to protect the meter from the elements.
- The complete meter assembly has a working pressure of 1600 kPa.
- The internal pipework is 20mm Ø with fusion welded fittings.

## METER BOX DIMENSIONS TABLE

Meter Box Size (mm)	15mm
Meter box height (H)	770
Meter box length (L2)	275
Meter box width lid (W)	153

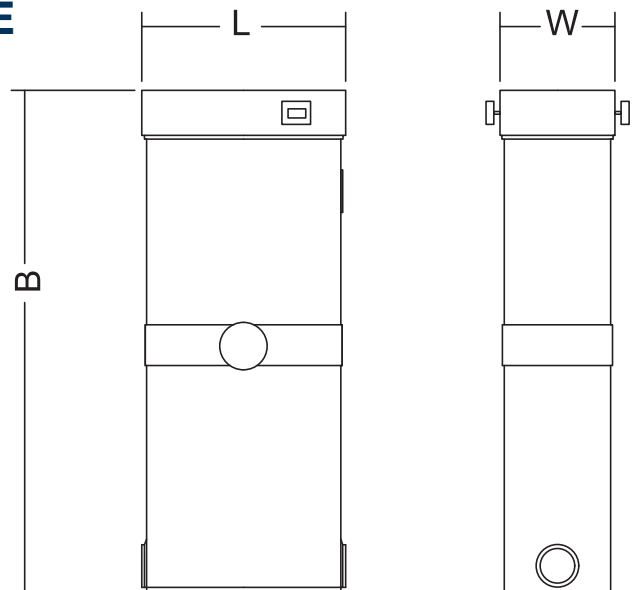

Please note that it is a legal requirement that all Polymer bodied meters be installed in an enclosure like a meter box.

## DOMESTIC METERS • BULK METERS • METER BOXES • SMART METERING